



BATTLINE LED 1.0



Advantages

- Luminous efficacy up to 127 lm/W
- 5-year warranty
- Minimalistic design
- Branded components




Battline LED 1.0 1


BTL1ST.10.047.8A3000	47	5850	3000K	>80	40	170°X115°	0,65kg
BTL1ST.10.047.8A4000	47	6000	4000K	>80	40	170°X115°	0,65kg





Battline LED 1.0 2

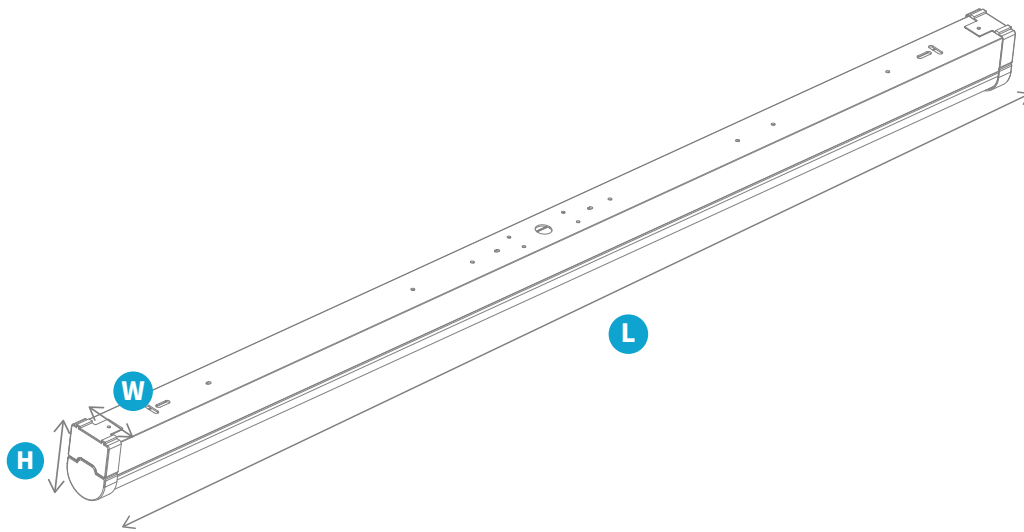BTL1ST.20.063.8A3000	63	7500	3000K	>80	40	170°X115°	0,8kg
BTL1ST.20.063.8A4000	63	7800	4000K	>80	40	170°X115°	0,8kg

Dimensions and Logistics



	H	L	W
BTL1ST.1	73	1199	52
BTL1ST.2	73	1498	52

			
BTL1ST.1	2	200	130x80
BTL1ST.2	2	200	160x80


Montage



Suspended



Luminous Intensity Distribution

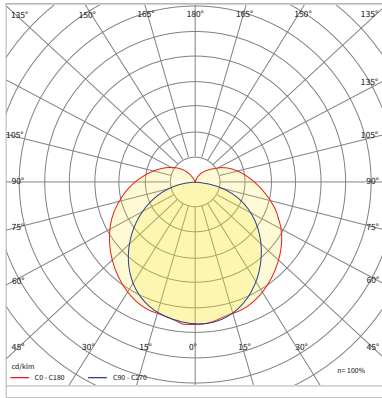

Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications
BTL1ST Battline LED 1.0	1	0	047	8	A	3000	0	P23	170115	00	2540	05Y	W001
	1	Standard	47W	>80	Mid Power	3000K	No lens	PC Matt	170°x115°	ON/OFF	-25÷40	5 years	RAL9016
	2		063			4000				D0			G001
	2		63W			4000K				DALI			RAL7038

Example product code:

[BTL1ST.10.047.8A3000.OP23.170115.00.2540.05Y.G001](#)