



CORDOBA LED 3.0 5-8



Advantages

- 5 years Warranty
- Corrosion resistant diodes
- Tool-free possibility to open the luminaire
- Pressure compensation valve in the housing
- Controllable in DALI, DIM 1-10V, Virtual Extension, PLC systems
- Programmable power supply with the possibility of reducing the lighting level at selected time



Cordoba LED 3.0 5

CRD3ST.50.081.7C3000	81	11450 - 12500	3000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.50.081.7C4000	81	12100 - 13200	4000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.50.081.7C5700	81	11950 - 13050	5700K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg

Cordoba LED 3.0 6









CRD3ST.60.108.7C3000	108	15500 - 16950	3000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.60.108.7C4000	108	16400 - 17900	4000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.60.108.7C5700	108	16250 - 17750	5700K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg

Cordoba LED 3.0 7

CRD3ST.70.120.7C3000	120	17000 - 18600	3000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.70.120.7C4000	120	18000 - 19700	4000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.70.120.7C5700	120	17850 - 19550	5700K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg

*IK10 available in non-NEMA and ZHAGA versions.


Cordoba LED 3.0 8

		 min-max					
CRD3ST.80.149.7C3000	149	20400 - 22300	3000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.80.149.7C4000	149	21600 - 23600	4000K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg
CRD3ST.80.149.7C5700	149	21350 - 23350	5700K	>70	IP66	15°x 150°, 35°x 150°, 45°x 150°, 50°x 155°...	8,1kg





List of available light angles

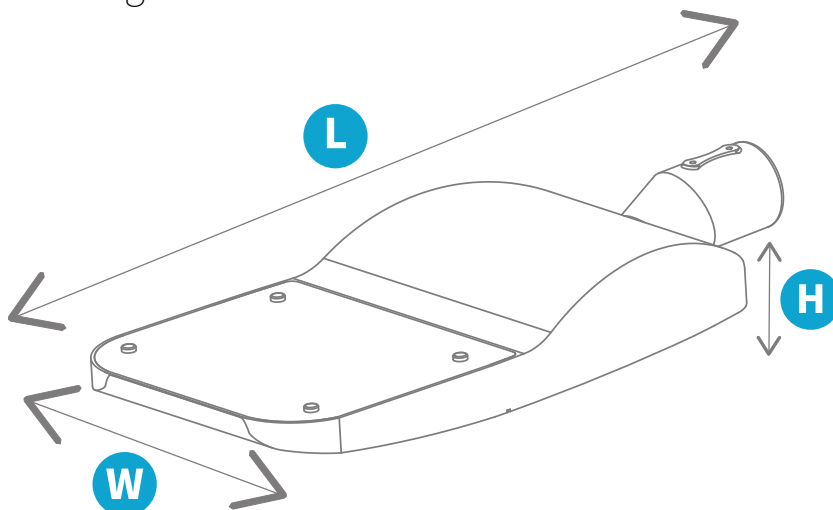HIGH POWER	
CRD3ST 5-8	15°x150°
	35°x150°
	45°x150°
	50°x155°
	55°x150°
	60°x150°
	60°x160°
	60°x165°
	65°x40°
	70°x120°
	75°x50°
	80°x15°
	80°x150°


Dimensions and Logistics




	H	L	W
CRD3ST 5-8	115	630	290

			
CRD3ST 5-8	1	30	120x80







Montage







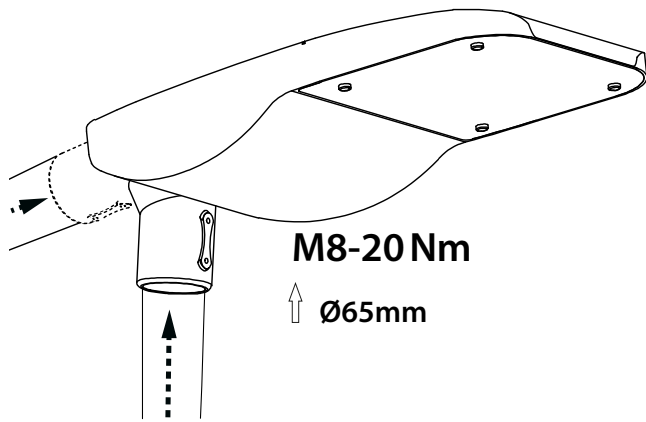


pole mounted



Luminous Intensity Distribution

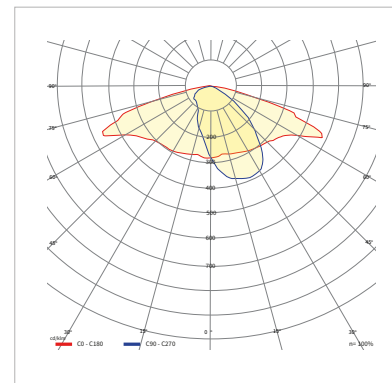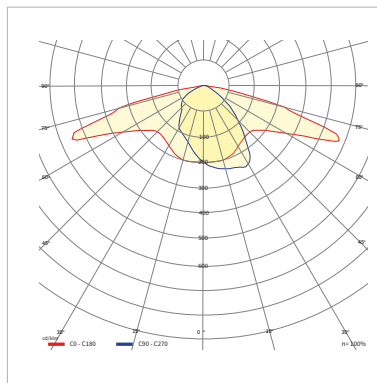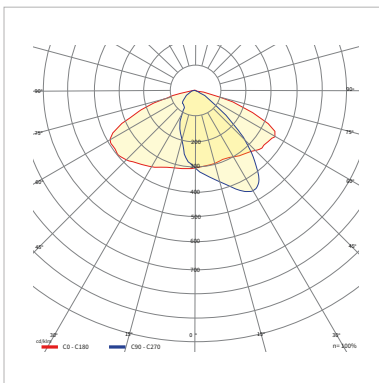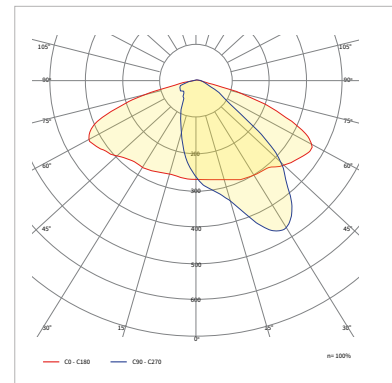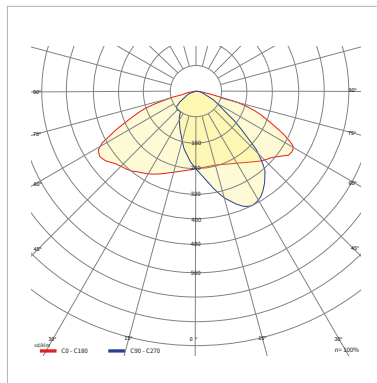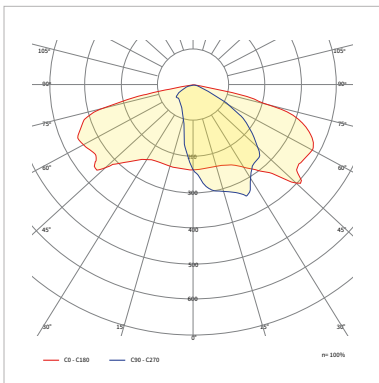

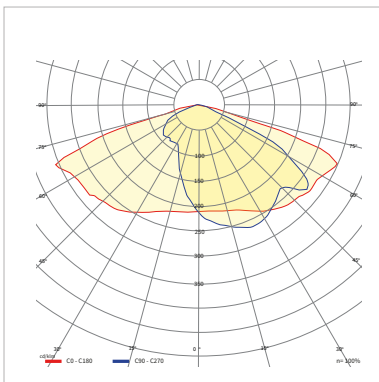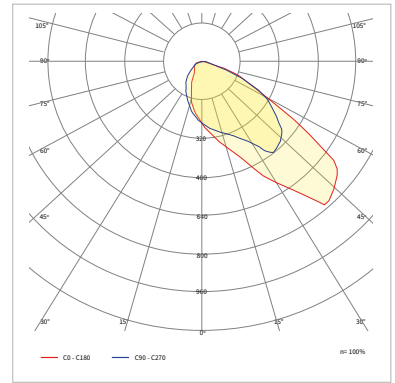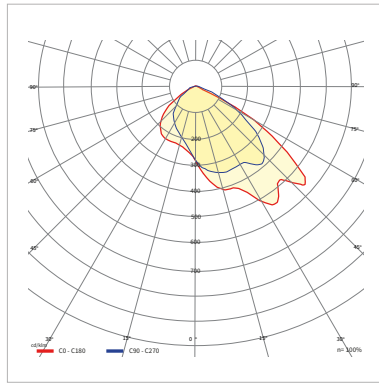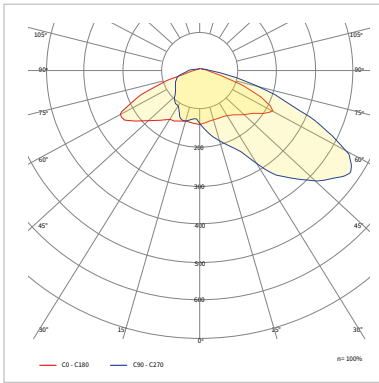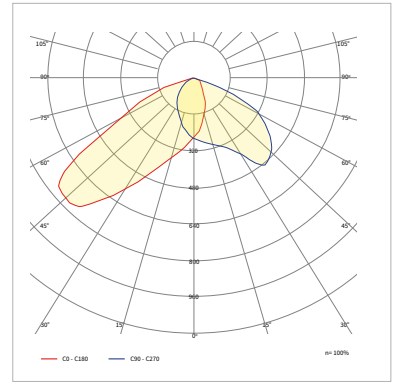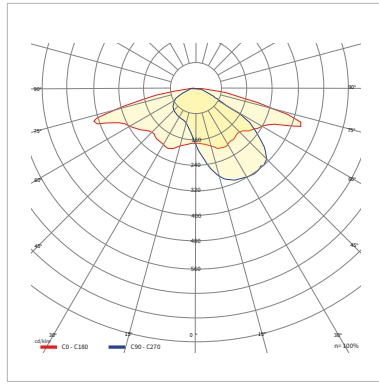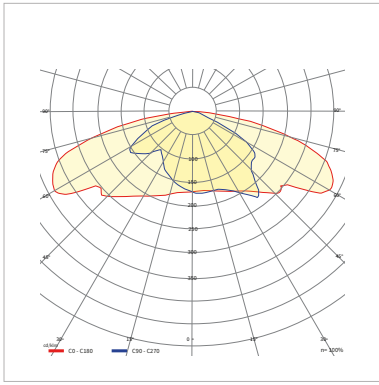

Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications	
CRD3ST CORDOBA LED 3.0	5	0	081	7	C	3000	1	G11 transparent tempered glass	015150	00	4040	05Y	0000	
	5	Standard	81W	>70	High Power	3000K	PMMA		15°x 150°	ON/OFF	-40÷40	5 years	Standard	
	6	8	108			4000			035150	N0			E002	
	6	ENECE	108W			4000K			35°x150°	Nema			II protection class	
	7	9	120			5700			045150	Z0			E100	
	7	ENECE +	120W			5700K			45°x150°	Zhaga top			10kV	
	8		149						050155				E102	
	8		149W						50°x155°				10kV; II protection class	
									055150					E300
										55°x150°				20kV
										060150				
										60°x150°				
										060160				
								60°x160°						
								060165						
								060°x165°						
								065040						
								65°x40°						
								070120						
								70°x120°						
								075050						
								75°x50°						
								080015						
								80°x15°						
								080150						
								80°x150°						

Example product code:

CRD3ST.50.081.7C3000.1G11.055150.00.4040.05Y.0000