



# DOWNLIGHT LED RC 3.0



## Advantages

- 5 years warranty
- Protection class IP65
- Aluminum housing for better heat dissipation and durability
- Quick and easy assembly



### Downlight LED RC 3.0 1

DWN3RC.10.015.8A3000	15	1800	3000K	>80	IP 65	110°	0.5kg
DWN3RC.10.015.8A4000	15	1900	4000K	>80	IP 65	110°	0.5kg

### Downlight LED RC 3.0 2


DWN3RC.20.020.8A3000	20	2550	3000K	>80	IP 65	110°	0.5kg
DWN3RC.20.020.8A4000	20	2700	4000K	>80	IP 65	110°	0.5kg


### Downlight LED RC 3.0 3





DWN3RC.30.030.8A3000	30	3400	3000K	>80	IP 65	110°	0.5kg
DWN3RC.30.030.8A4000	30	3600	4000K	>80	IP 65	110°	0.5kg

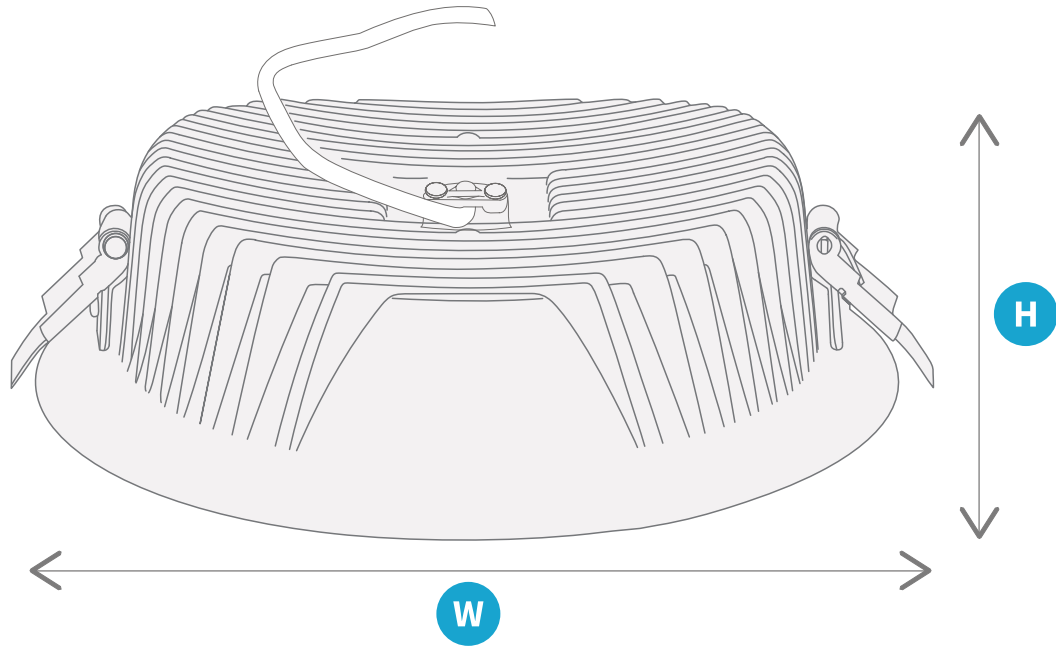In order to know exact the light parameters for selected beam angle, please use photometric files for the given beam angle. Download link: [luxon.pl/Pliki/LDT-LUXON-LED-2020.zip](http://luxon.pl/Pliki/LDT-LUXON-LED-2020.zip)

# Dimensions and Logistics



	H	W
DWN3RC	75	190

			
DWN3RC	1	128	120x80


## Montage



**Recessed mounting**



## Luminous Intensity Distribution

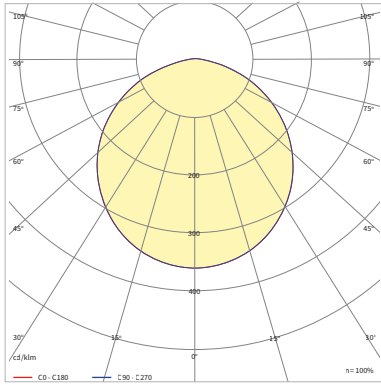

## Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications
DWN3RC DOWNLIGHT LED RC 3.0	1	0 Standard	015	8 >80	A Mid Power	3000	0 No lens	P13 PMMA matt	110110 110°x110°	00 ON/OFF	2040 -20+40	05Y 5 years	0000 Standard
	1		15W			3000K				D0 DALI			
	2		020			4000							
	2		20W			4000K							
3	030												
3	30W												

Example product code:

[DWN3RC.10.015.8A3000.0P13.110110.00.2040.05Y.0000](#)

