

IT FIT 30/220...240/700 CS

ICUTRONIC FIT CS | Constant Current Compact – Non dimmable



Product family features

- Supply voltage: 220...240 V
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198...254 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression according to CISPR 15
- Line harmonics according to IEC 61000-3-2
- Immunity according to IEC 61547
- Fixed output (no dimming)

Product family benefits

- Higher quality of light thanks to low output ripple current
- High flexibility due to eight different output currents
- Small housing for flexible luminaire designs
- High efficiency
- Long lasting and high reliability
- Safety ensured by OSRAM (SELV)

Areas of application

- Suitable for downlights, spotlights and LED panels
- Suitable for indoor SELV installations
- Installation and independent mounting via Cable Clamp Kit possible



Technical data

Electrical data

Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V ¹⁾
Total harmonic distortion	< 10 % ²⁾
Power factor λ	0.98 ³⁾
Efficiency in full-load	88 % ⁴⁾
Device power loss	3.6 W ⁵⁾
Protective conductor current	<0.7 mA
Inrush current	23 A ⁶⁾
Max. ECG no. on circuit breaker 10 A (B)	25
Max. ECG no. on circuit breaker 10 A (C)	42
Max. ECG no. on circuit breaker 16 A (B)	40
Max. ECG no. on circuit breaker 16 A (C)	68
Surge capability (L/N-Ground)	2 kV ⁷⁾
Surge capability (L-N)	1 kV ⁸⁾
Nominal output voltage	23...42 V
U-OUT (working voltage)	60 V
Nominal output current	350 / 400 / 450 / 500 / 550 / 600 / 650 / 700 mA ⁹⁾
Output current tolerance	±5 %
Output ripple current (100 Hz)	< 3 % ¹⁰⁾
Output PSTLM	≤1
Output SVM	≤0.4
Nominal output power	8.05...29.4 W
Maximum output power	29.4 W
Galvanic isolation primary/secondary	SELV
Galvanic isolation	SELV
Current set	DipSwitch
Default output current	700 mA

¹⁾ Permitted voltage range

²⁾ At full load, 230 V, 50 Hz / see graphs

³⁾ Full load at 230 V/50 Hz

⁴⁾ at 230 V, 50 Hz

⁵⁾ At 230 V, Input power 33 W max.


⁶⁾ $t_{width} = 50 \mu s$ (measured at 50 % I_{peak})

⁷⁾ L/N – PE acc to EN 61547 Clause 5.7


⁸⁾ L/N

⁹⁾ ±5%


¹⁰⁾ Ripple average at 100 Hz

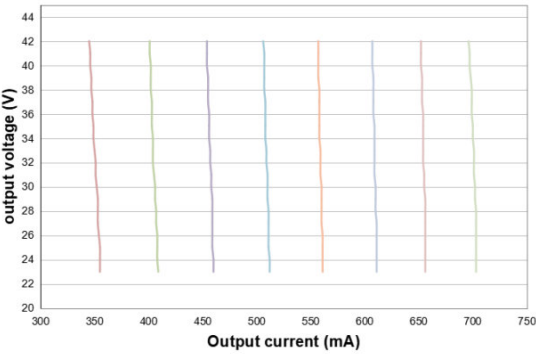


IT FIT 30 500 CS Independent Operating Window

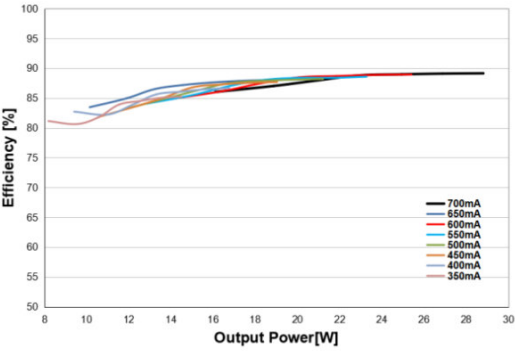

IT FIT 30 700 CS Independent Typical Efficiency vs Load

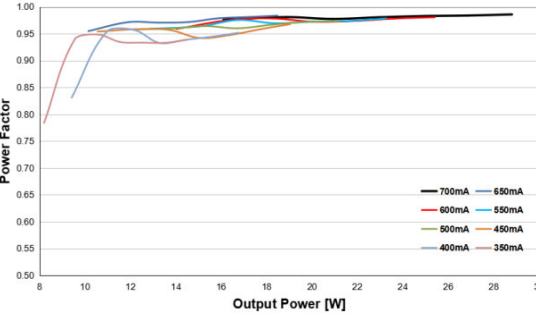

IT FIT 30 700 CS Independent Typical Power Factor vs Load

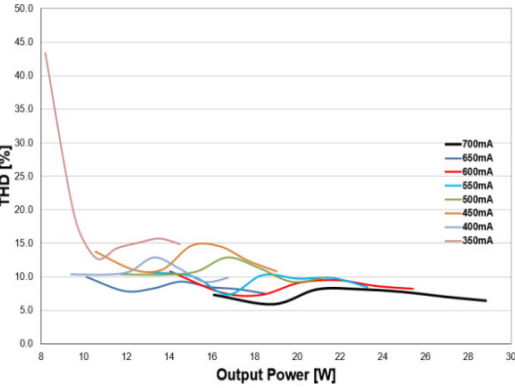

IT FIT 30 700 CS Independent Typical THD vs Load

Table 1 - Rated output power and current sets									
I _{out} [A]	350	400	450	500	550	600	650	700	
U _{min} [V]	23	23	23	23	23	23	23	23	
U _{max} [V]	42	42	42	42	42	42	42	42	
P _{min} [W]	8.05	9.2	10.35	11.5	12.65	13.8	14.95	16.1	
P _{max} [W]	14.7	16.8	18.9	21	23.1	25.2	27.3	29.4	
T _a [°C]	50	50	50	50	50	50	50	50	
T _c [°C]	80	80	80	80	80	80	80	80	
Line Current, nominal @230V [mA]	95	104	112	121	132	141	150	160	
Max Power Loss @230V [W]	2.8	3.2	3.1	3.5	3.9	3.8	3.2	3.6	
Input Power @230V [W]	17.5	20	22	24.5	27	29	30.5	33	



Current selection by DIP-switch

PIN1	PIN2	PIN3	I _{out} (mA)
OFF	OFF	OFF	350
ON	OFF	OFF	400
OFF	ON	OFF	450
ON	ON	OFF	500
OFF	OFF	ON	550
ON	OFF	ON	600
OFF	ON	ON	650
ON	ON	ON	700

IT FIT 30 700 CS Rated output power and current sets

700 CS Current selection by DIP switch

Dimensions & weight



Mounting hole spacing, length	88.0 mm
Mounting hole spacing, width	34.0 mm
Product weight	99.50 g
Cable cross-section, input side	0.5...1.5 mm ²
Cable cross-section, output side	0.5...1.5 mm ²
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Length	97.0 mm
Width	43.0 mm
Height	29.5 mm

Colors & materials

Casing material	Plastic
-----------------	---------

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	80 °C ¹⁾
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-20...80 °C ²⁾
Permitted rel. humidity during operation	5...85 % ³⁾

¹⁾ Measured on tc point indicated on the product label.

²⁾ Cool down before operating

³⁾ Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	50000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum T_c = 80°C / 10% failure rate

Additional product data

Encapsulated	No
Predecessor EAN	4052899617322

Capabilities

Dimmable	No
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Intended for no-load operation	No
Max. cable length to lamp/LED module	2.0 m ¹⁾
Suitable for fixtures with prot. class	I / II
Type of connection, input side	Push terminal
Type of connection, output side	Push terminal
Suitable for through-wiring	Yes with optional cable clamp
Programming interface	Dipswitch
Number of channels	1

¹⁾ Output wires must be routed as close as possible to each other

Programming

Programming device	DIPswitch
--------------------	-----------

Product datasheet

Certificates & standards

Approval marks – approval	CE / CCC / RCM / UKCA / ENEC 25
Standards	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547
Type of protection	IP20
Protection class	I,II

Logistical data

Commodity code	85044083900
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	21-04-2023
Primary Article Identifier	4062172326360
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	8400739c-f4f9-48c6-b0cd-2c21e4d1e89b

Additional product information

- Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Download Data

File	
	User instruction IT FIT 220-240 CS UI 15116985 120122
	Certificates IT FIT 20 30 40 CS ENEC U6 084117 0135 210423
	CAD data 3-dim IT FIT 220-240 CS CAD3PDF 120122

Product datasheet

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172326360	IT FIT 30/220...240/700 CS	Shipping carton box 50	225 mm x 214 mm x 180 mm	8.67 dm ³	5280.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
IT FIT 30/220...240/700 CS	OT CABLE CLAMP D-STYLE	▶ 4062172345507
IT FIT 30/220...240/700 CS	OT CABLE CLAMP D-STYLE TL	▶ 4062172349185

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.