



ELEMENTO LED 1.0

Vorteile

- 10 Jahren Garantie
- Hohe Lichtausbeute bis zu 178lm/W
- Aluminiumgehäuse für bessere Wärmeableitung und Haltbarkeit
- Schnelle und einfache Installation



Elemento LED 1.0 1

	P	min-max		Ra	IP		
ELM1ST.10.032.8A4000	32	5250 - 5650	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg
ELM1ST.10.032.8A5000	32	5500 - 5700	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg

Elemento LED 1.0 2









	P	min-max		Ra	IP		
ELM1ST.20.044.8A4000	44	6900 - 7450	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg
ELM1ST.20.044.8A5000	44	6950 - 7500	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg

Elemento LED 1.0 3









	P	min-max		Ra	IP		
ELM1ST.30.068.8A4000	68	10900 - 11850	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg
ELM1ST.30.068.8A5000	68	10950 - 11900	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg

Um die Lichtparameter für den ausgewählten Abstrahlwinkel genau zu kennen, verwenden Sie bitte photometrische Dateien für den angegebenen Abstrahlwinkel. Download-Link: luxon.pl/Pliki/LDT-LUXON-LED-2020.zip









Elemento LED 1.0 4

							
ELM1ST.40.084.8A4000	84	13000 - 14200	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg
ELM1ST.40.084.8A5000	84	13050 - 14250	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg

Elemento LED 1.0 5


							
ELM1ST.50.096.8A4000	96	15250 - 16600	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg
ELM1ST.50.096.8A5000	96	15300 - 16650	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg


Elemento LED 1.0 6





							
ELM1ST.60.112.8A4000	112	17250 - 18850	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg
ELM1ST.60.112.8A5000	112	17300 - 18900	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg

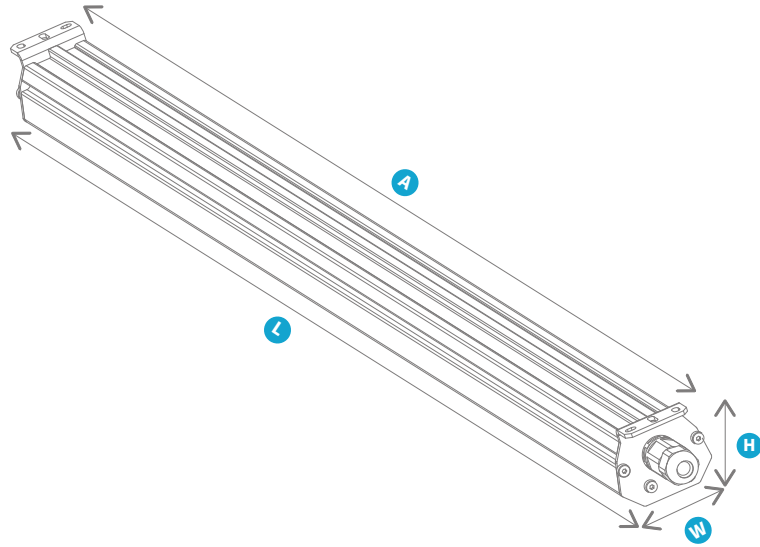


Abmessungen und Logistik




	H	L	W	A
ELM1ST.1	63	1210	72	1160
ELM1ST.2	63	1210	72	1160
ELM1ST.3	63	1770	72	1720
ELM1ST.4	63	1770	72	1720
ELM1ST.5	63	2330	72	2280
ELM1ST.6	63	2330	72	2280

			
ELM1ST	1	32	120x80


Montageart

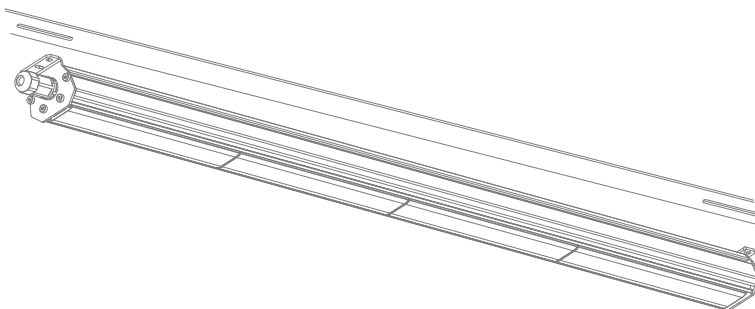







Seilabhängung



Deckeneinbau



Lichtstärke

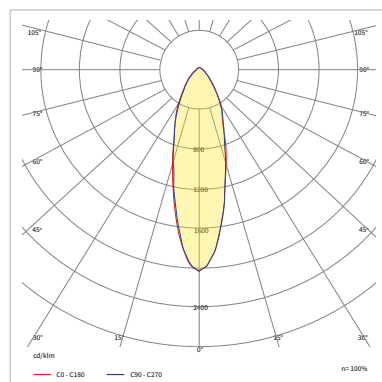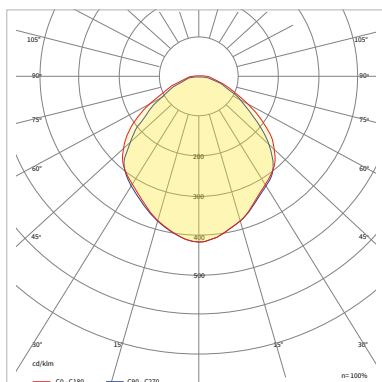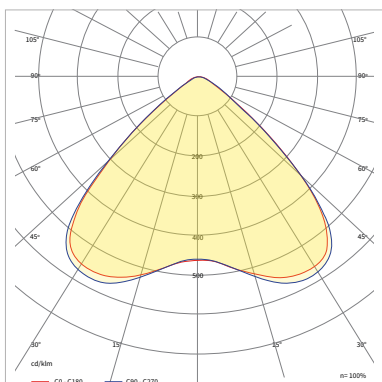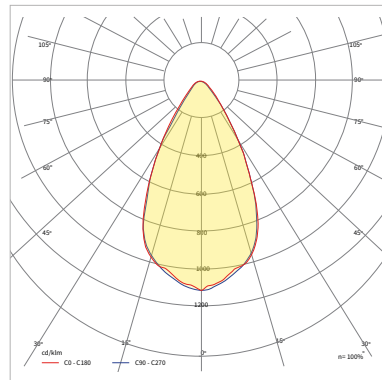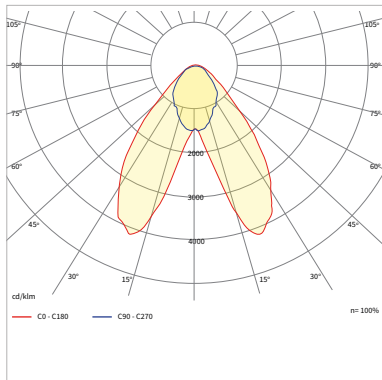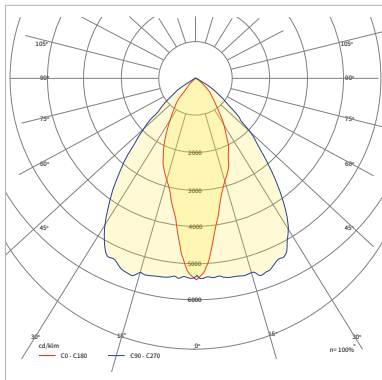

Verfügbare Konfigurationen

Familie	Leistungs- version	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahl- winkel	Lichtsteu- erung	Betriebstem- peratur [°C]	Garantie	Modifika- tionen			
ELM1ST ELEMENTO LED 1	1	0 Standard	032	8 >80	A Mid Power	4000	2 PC	000 Keine	030030	00 ON/OFF	2540	05Y 5 Jahre	0000 Standard			
	1		32W			4000K			30°x30°		-25+40					
	2		044			5000			035085		2545			35°x85°	-25+45	
	2		44W			5000K			055055		2550			55°x55°	-25+50	10Y 10 Jahre
	3		068			080080			3545		80°x80°			-35+45		
	4		084			090090			3550		90°x90°			-35+50		
	5		096			105100			3555		105°x100°			-35+55		
6	112	112W														

Beispiel-Produktcode

ELM1ST.10.032.8A4000.2000.030030.00.2550.05Y.0000