



ELEMENTO LED 1.0

Przewagi

- Gwarancja do 10 lat
- wysoka skuteczność świetlna do 176lm/W
- obudowa z aluminium, zapewniająca lepsze odprowadzanie ciepła i trwałość
- szybki i prosty montaż



Elemento LED 1.0 1

ELM1ST.10.032.8A4000	32	5250 - 5650	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg
ELM1ST.10.032.8A5000	32	5500 - 5700	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg









Elemento LED 1.0 2

ELM1ST.20.044.8A4000	44	6900 - 7450	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg
ELM1ST.20.044.8A5000	44	6950 - 7500	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	2,9kg









Elemento LED 1.0 3

ELM1ST.30.068.8A4000	68	10900 - 11850	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg
ELM1ST.30.068.8A5000	68	10950 - 11900	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg









Elemento LED 1.0 4

		 min-max					
ELM1ST.40.084.8A4000	84	13000 - 14200	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg
ELM1ST.40.084.8A5000	84	13050 - 14250	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	3,9kg

Elemento LED 1.0 5


		 min-max					
ELM1ST.50.096.8A4000	96	15250 - 16600	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg
ELM1ST.50.096.8A5000	96	15300 - 16650	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg


Elemento LED 1.0 6





		 min-max					
ELM1ST.60.112.8A4000	112	17250 - 18850	4000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg
ELM1ST.60.112.8A5000	112	17300 - 18900	5000K	>80	IP44	30°, 35°x85°, 55°, 80°, 90°, 105°x100°	4,9kg

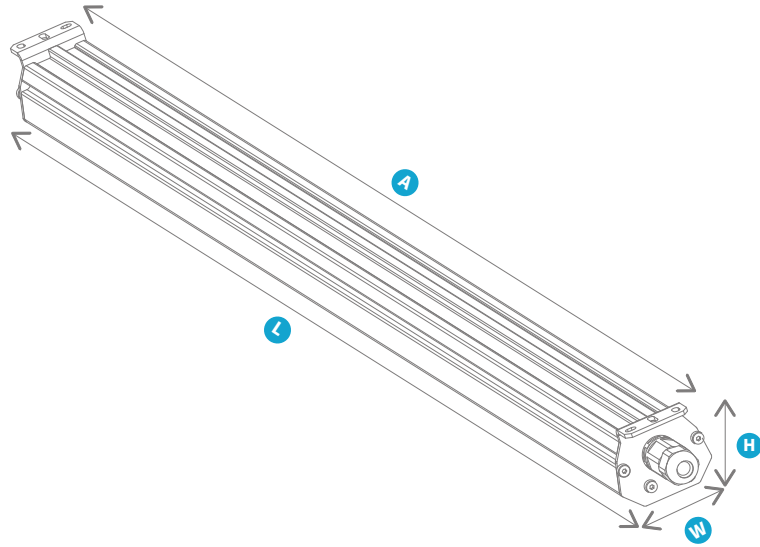


Wymiarowanie i Logistyka




	H	L	W	A
ELM1ST.10	63	1210	72	1160
ELM1ST.20	63	1210	72	1160
ELM1ST.30	63	1770	72	1720
ELM1ST.40	63	1770	72	1720
ELM1ST.50	63	2330	72	2280
ELM1ST.60	63	2330	72	2280

			
ELM1ST	1	32	120x80


Montaż

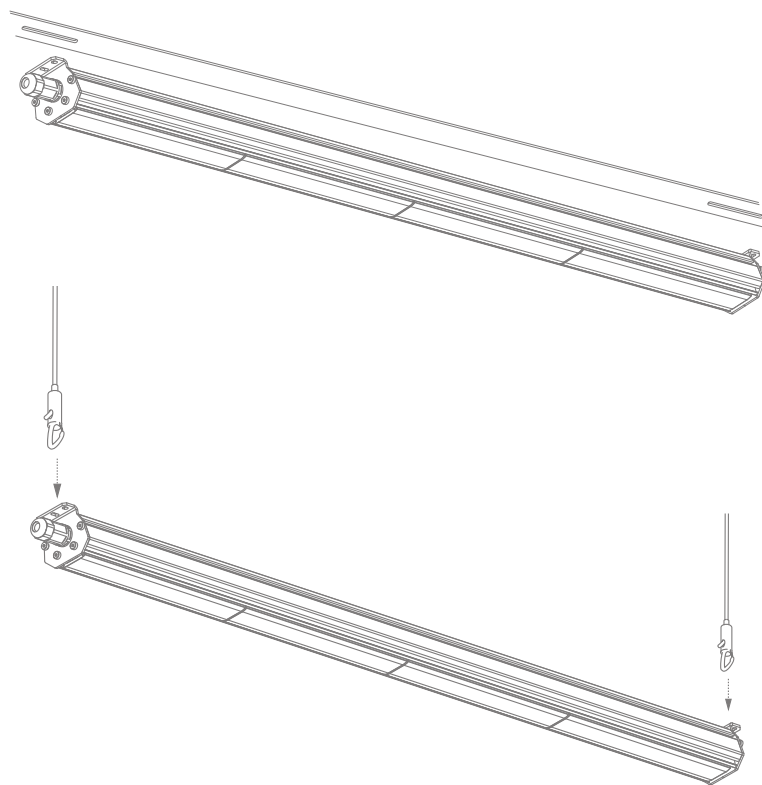







zwieszany



natynkowy



Rozsył Światłości

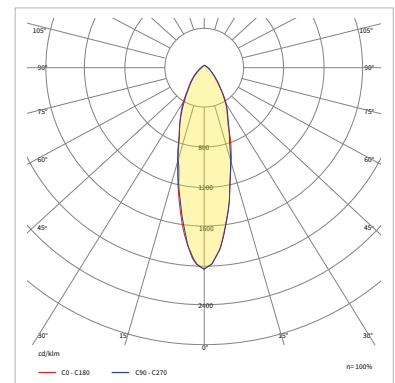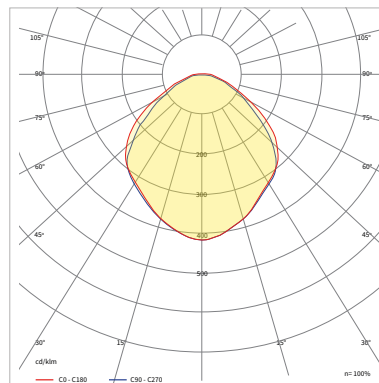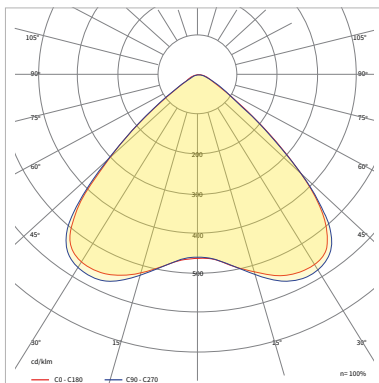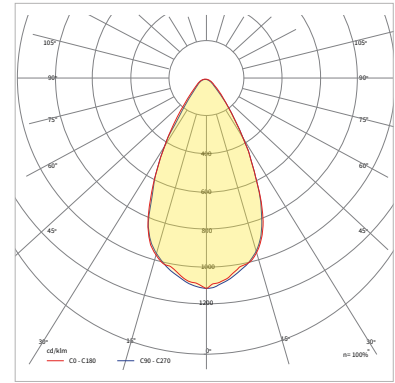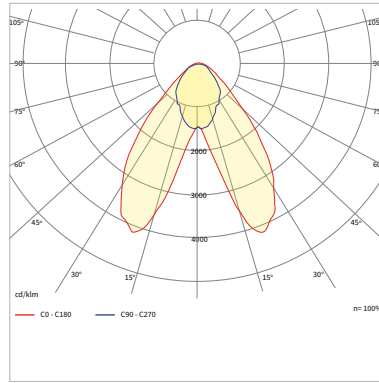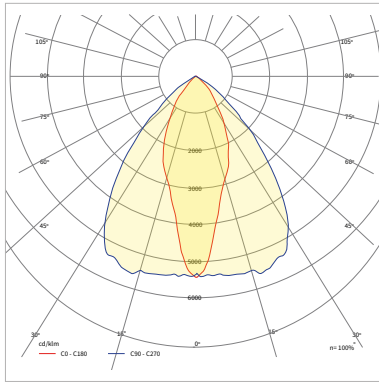

Dostępne konfiguracje

Rodzina	Wersja mocowa	Certyfikat	Moc [W]	CRI	Typ diody	CCT [K]	Materiał soczewki	Materiał dyfuzora	Rozsył	Sterowanie	Temperatura pracy [°C]	Gwarancja	Modyfikacje
ELM1ST ELEMENTO LED 1	1	0 Nie występuje	032	8 >80	A Mid Power	4000	2 Soczewka PC	000 Nie występuje	030030	00 ON/OFF	2540	05Y 5 lat	0000 Standard
	1		32W			4000K			30x30		-25+40		
	2		044			5000			035085		2545		
	2		44W			5000K			35x85		-25+45		
	3		068			555055			55x55		2550		
	3		68W			080080			80x80		-35+45		
	4		084			090090			90x90		3545		
4	84W	105100	105tx100	-35+55									
5	096	96W	3550	DO Dali Przewodowe	2545	08Y 8 lat							
5	96W	2550	10Y 10 lat										
6	112	112W	3545	3550	3555								
6	112W	3555											

Przykładowy kod produktu:

[ELM1ST.10.032.8A4000.2000.030030.00.2550.05Y.0000](#)