



# INDUSTRIAL LED DC 6.0



## Vorteile

- Hohe Lichtausbeute von bis zu 180 Lm/W
- IP66 Leuchte
- Schnelle und einfache Montage
- Markenkomponenten
- Bis zu 10 Jahre Garantie
- hoher Temperaturbereich




### Industrial LED 6.0 DC 1


IND6DC.10.036.8A3000	36	5550	3000K	>80	IP 66	135°X90°	1,2kg
IND6DC.10.036.8A4000	36	5800	4000K	>80	IP 66	135°X90°	1,2kg
IND6DC.10.036.8A5000	36	5850	5000K	>80	IP 66	135°X90°	1,2kg





### Industrial LED 6.0 DC 2

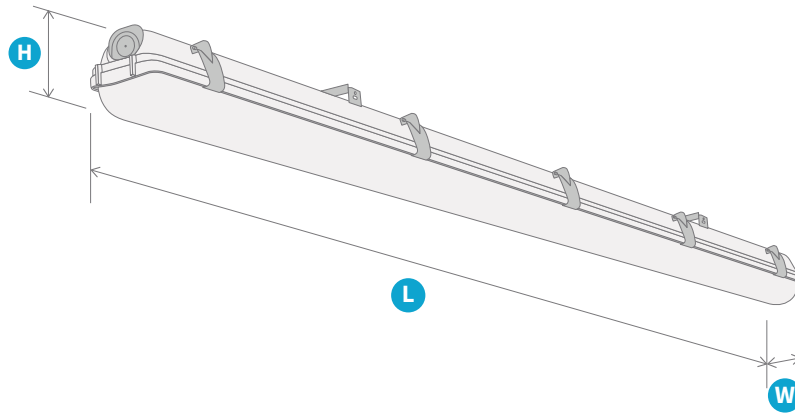IND6DC.20.044.8A3000	44	7400	3000K	>80	IP 66	120°X110°	2kg
IND6DC.20.044.8A4000	44	7650	4000K	>80	IP 66	120°X110°	2kg
IND6DC.20.044.8A5000	44	7700	5000K	>80	IP 66	120°X110°	2kg

# Abmessungen und Logistik



	H	L	W
IND6DC.10	104	660	97
IND6DC.20	84	1277	97

			
IND6DC.10	10	100	160x80
IND6DC.20	10	100	160x80

# Montageart





**Deckenaufbau**







**Seilabhängung**



# Lichtstärke

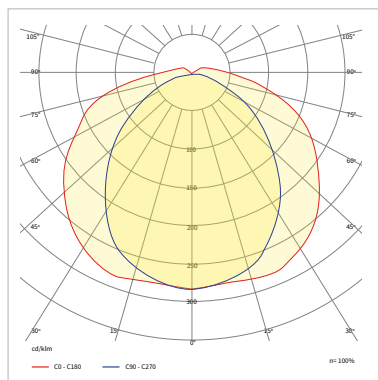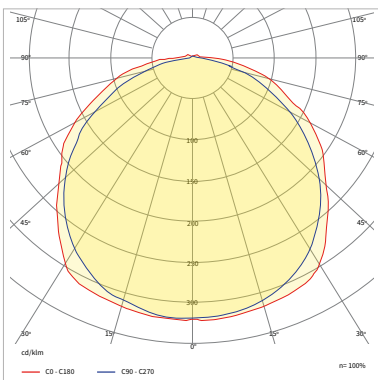

# Verfügbare Konfigurationen

Familie	Leistungs- version	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahl- winkel	Lichtsteu- erung	Betriebstem- peratur [°C]	Garantie	Modifika- tionen
IND6DC Industrial LED DC 6.0	1	0 Standard	032 32W	8 >80	A Mid Power	3000 3000K	0 Keine Linse	P21 PC transparent	120110 120°x110°	00 ON/OFF	0030 0÷30	03Y 3 Jahre	0000 Standard
	2		042 42W			4000 4000K		P23 PC matt	135090 135°x90°				E001 Durchgan- gsversion
	2		5000 5000K						E004 Durchgan- gsversion; Schnellan- schluss				
								E010 Schnellan- schluss					

## Beispiel-Produktcode

IND6DC.20.044.8A5000.OP21.120110.00.0030.03Y.E001