



# INDUSTRIAL LED 6.0 ENEC



## Advantages

- High luminous efficacy up to 180 lm / W
- IP66 luminaire
- IK08 resistance class
- High operating temperature range



### Industrial LED 6.0 1

IND6ST.18.032.8A3000	32	5450	3000K	>80	IP 66	110°	2kg
IND6ST.18.032.8A4000	32	5650	4000K	>80	IP 66	110°	2kg
IND6ST.18.032.8A5000	32	5700	5000K	>80	IP 66	110°	2kg

### Industrial LED 6.0 2









IND6ST.28.042.8A3000	42	7200	3000K	>80	IP 66	110°	2kg
IND6ST.28.042.8A4000	42	7450	4000K	>80	IP 66	110°	2kg
IND6ST.28.042.8A5000	42	7500	5000K	>80	IP 66	110°	2kg

### Industrial LED 6.0 3


IND6ST.38.066.8A3000	66	11500	3000K	>80	IP 66	110°	2,4kg
IND6ST.38.066.8A4000	66	11850	4000K	>80	IP 66	110°	2,4kg
IND6ST.38.066.8A5000	66	11900	5000K	>80	IP 66	110°	2,4kg


In order to know exact the light parameters for selected beam angle, please use photometric files for the given beam angle. Download link: [luxon.pl/Pliki/LDT-LUXON-LED-2020.zip](http://luxon.pl/Pliki/LDT-LUXON-LED-2020.zip)





## Industrial LED 6.0 4

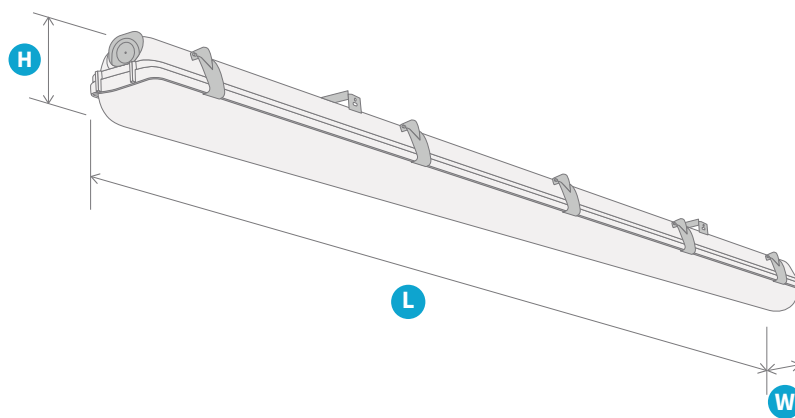							
IND6ST.48.097.8A3000	97	15300	3000K	>80	IP 66	110°	2,4kg
IND6ST.48.097.8A4000	97	15800	4000K	>80	IP 66	110°	2,4kg
IND6ST.48.097.8A5000	97	15850	5000K	>80	IP 66	110°	2,4kg

## Dimensions and Logistics




	H	L	W
IND6ST 1	80	1277	97
IND6ST 2	80	1277	97
IND6ST 3	80	1573	97
IND6ST 4	80	1573	97

			
IND6ST 1	10	100	160x80
IND6ST 2	10	100	160x80
IND6ST 3	10	100	160x80
IND6ST 4	10	100	160x80

## Montage



# Luminous Intensity Distribution

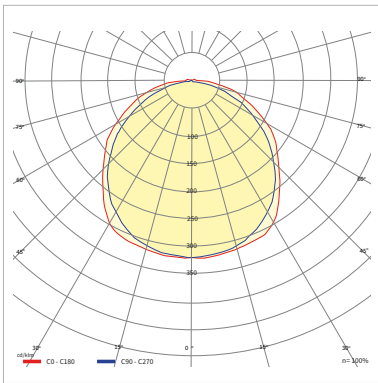

# Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications		
IND6ST Industrial LED 6	1	8 ENEC	032 32W	8 >80	A Mid Power	3000 3000K	0 No lens	P21 PC transparent	110110 110°x110°	00 ON/OFF	3050 -30÷50	05Y 5 years	0000 Standard		
	2		042 42W			4000 4000K				D0 DALI				2540 -25÷40	08Y 8 years
	3		066 66W			5000 5000K									
	4		097 97W												

Example product code

[IND6ST.28.042.8A4000.OP21.110110.D0.2540.05Y.0000](#)