

SUPERTRUNK LED MT 1.0

Zalety

- Żywotność L80B10 na poziomie 100 tysięcy godzin
- Wysoka efektywność świetlna do 178 lm/W
- Solidna obudowa wykonana z aluminium
- Szybki i prosty montaż
- Niski współczynnik UGR



IP20

IK02



SUPERTRUNK LED MT 1.0 1



P



Ra

IP



STR1MT.10.072.8A3000

46-72

6700 -
11300

3000K

>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

STR1MT.10.072.8A4000

46-72

7300 -
12400

4000K

>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

STR1MT.10.072.8A5000

46-72

7350 -
12450

5000K


>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

***W zależności od zastosowanej soczewki, moc strumienia świetlnego może się różnić, dlatego w tabeli mogą być podane zakresy strumienia świetlnego dla danej wersji mocy, służące celom poglądowym.**

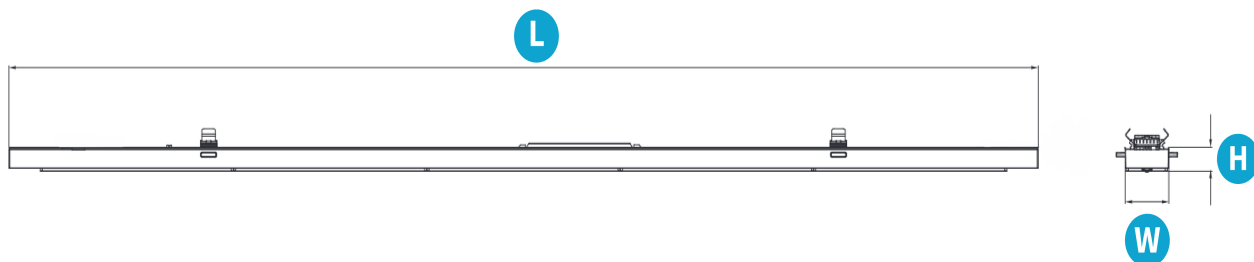

H

W

L


STR1MT.1

32

65

1528


Montaż

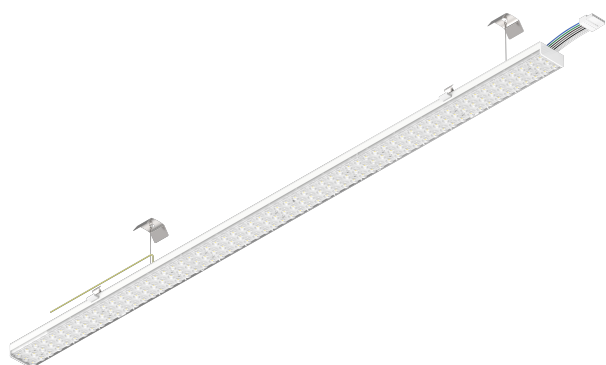


Zwieszany




Natężenie światła

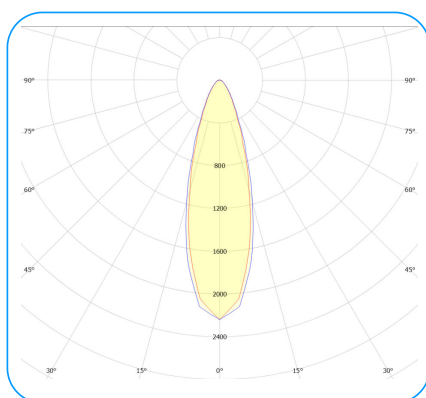


30°X30°

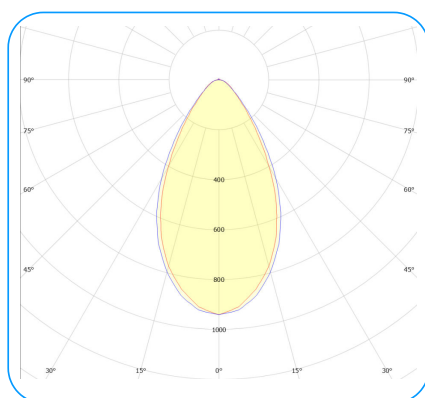

60°X60°

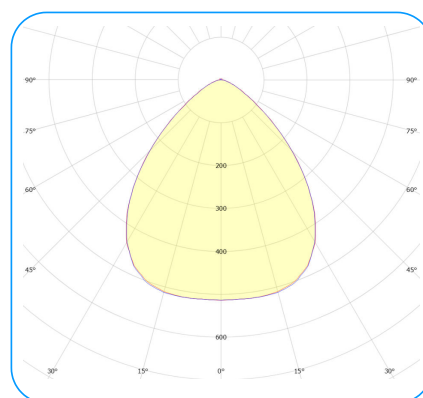

90°X90°

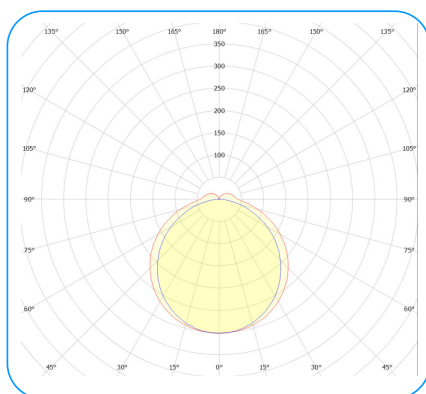

120°X105°

Dostępne konfiguracje

Rodzina	Wersja mocowa	Wersja	Moc [W]	CRI	Typ diody	CCT [K]	Materiał soczewki	Materiał dyfuzora	Kąt rozsyłu	Sterowanie	Temperatura pracy	Gwarancja	Modyfikacje
STR1MT SUPERTRUNK LED MT 1.0	1 1	0 Standard	072 72W	8 >80	A Midpower	3000 3000K	0 Brak soczewki	000 Nie występuje	030030 30°x30°	00 On/Off	2040 -20°C÷40°C	05Y 5 Lat	0000 Brak
						4000 4000K	1 Soczewka PMMA	P22 Dyfuzor PC Frost	060060 60°x60°	D0 DALI			E005 Wersja przelotowa; Zasilanie 3-faz.
						5000 5000K			065065 65°x65°				
									075130 75°x130°				
									090090 90°x90°				
									110120 110°x120°				
									120105 120°x105°				

Przykładowy kod produktu

STR1MT.10.072.8A3000.1000.030030.00.2040.05Y.E005

Galeria zdjęć

