

ULTIMA LED DB 3.0

Zalety

- Stopień szczelności na poziomie IP65
- Wysoka odporność na uderzenia IK10
- Solidna obudowa wykonana z aluminium
- Markowe komponenty
- Gwarancja do 10 lat



IP65

IK06



ULTIMA LED DB 3.0 1



P



Ra

IP



ULT3DB.10.222.8A4000

222

36400

4000K

>80

IP65

65°X60° 95°X90°

11,2kg

ULT3DB.10.222.8A5000

222

36400 - 36450

5000K

>80

IP65

65°X60° 95°X90°

11,2kg

ULT3DB.10.290.8A4000

290

45700

4000K

>80

IP65

65°X60° 95°X90°

11,2kg

ULT3DB.10.290.8A5000

290

45750

5000K


>80

IP65

65°X60° 95°X90°

11,2kg

***W zależności od zastosowanej soczewki, moc strumienia świetlnego może się różnić, dlatego w tabeli mogą być podane zakresy strumienia świetlnego dla danej wersji mocy, służące celom poglądowym.**

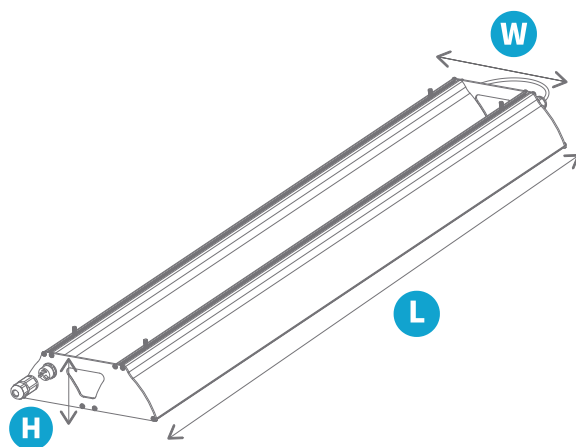

H

W

L

ULT3DB.1

91

270

1375

Montaż




Natynkowy




Zwieszany



Natężenie światła

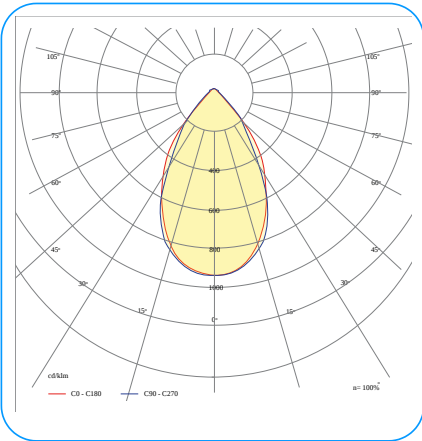

65°X60°

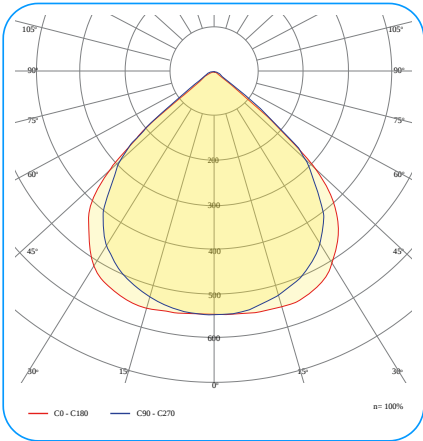

95°X90°

Dostępne konfiguracje

Rodzina	Wersja mocowa	Wersja	Moc [W]	CRI	Typ diody	CCT [K]	Materiał soczewki	Materiał dyfuzora	Kąt rozsyłu	Sterowanie	Temperatura pracy	Gwarancja	Modyfikacje
ULT3DB ULTIMA LED DB 3.0	1 1	0 Standard	222 222W	8 >80	A Mid Power	4000 4000K	1 Soczewka PMMA	G11 Szkło hartowane transparent ny	065060 65°x60°	00 On/Off	2540 -25°C÷+40°C	05Y 5 Lat	0000 Brak
			290 290W			5000 5000K		P11 Dyfuzor PMMA transparent ny	095090 95°x90°	D0 DALI	2545 -25°C÷+45°C	08Y 8 Lat	
											3545 -35°C÷+45°C	10Y 10 Lat	
											3550 -35°C÷+50°C		

Przykładowy kod produktu

ULT3DB.10.222.8A5000.1G11.065060.00.2545.08Y.0000