




MADRID LED A 1.0

Advantages

- IP66 rated luminaire
- Branded components
- High impact resistance IK09
- Solid aluminum housing

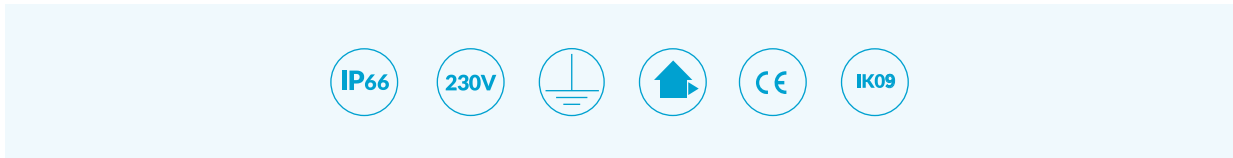

Madrid LED A 1.0 1


MAD1WA.10.025.8A3000	25	2750	3000K	>80	IP 66	135°x135°	7,1 kg






Madrid LED A 1.0 2

MAD1WA.20.050.8A3000	50	5700	3000K	>80	IP 66	135°x135°	7,1 kg

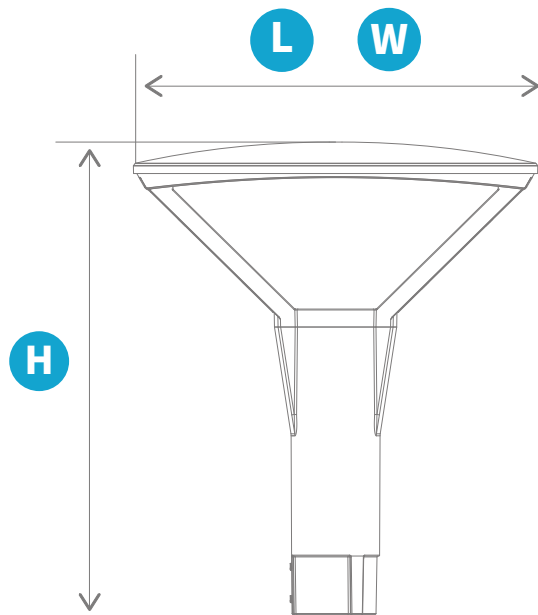In order to know exact the light parameters for selected beam angle, please use photometric files for the given beam angle. Download link: luxon.pl/Pliki/LDT-LUXON-LED-2020.zip

Dimensions and Logistics



	H	L	W
MAD1WA	526	450	450
			
MAD1WA	1	24	120x80


Montage



pole



Luminous Intensity Distribution

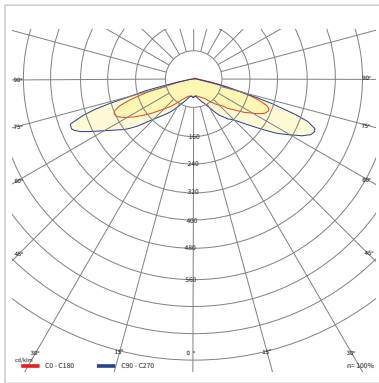

Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications
MAD1WA MADRID LED A 1.0	1	0	025	8	A	3000	1	G11	135135	B0	3045	05Y	0000
	1	Standard	25W	>80	Mid Power	3000K	PMMA	Tempered glass transparent	135x135	Time dimming	-30+45	5 years	Standard
	2		050										
	2		50W										

Example product code:

[MAD1WA.10.025.8A3000.1G11.135135.B0.3045.05Y.0000](#)