



ULTIMA LED 3.0 DB

Vorteile


- Schutzart IP65
- hohe Schlagfestigkeit IK10
- Solides Gehäuse aus Aluminium
- Markenkomponenten
- Garantie bis zu 10 Jahren








Ultima LED DB 3.0 1

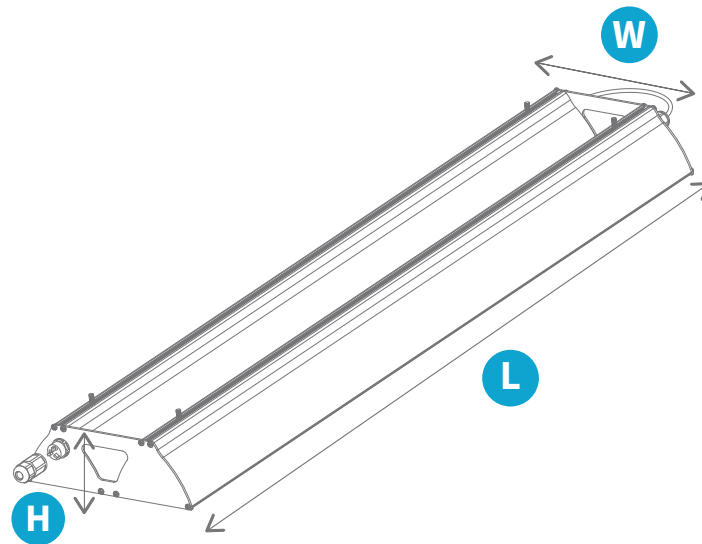ULT3DB.10.222.8A4000	222	36400	4000K	>80	IP 65	65°x 60°, 95°x90°	11,2kg
ULT3DB.10.222.8A5000	222	36400 - 36450	5000K	>80	IP 65	65°x 60°, 95°x90°	11,2kg
ULT3DB.10.290.8A4000	290	45700	4000K	>80	IP 65	65°x 60°, 95°x90°	11,2kg
ULT3DB.10.290.8A5000	290	45750	5000K	>80	IP 65	65°x 60°, 95°x90°	11,2kg


Abmessungen und Logistik



	H	L	W
ULT3DB.1	91	1375	270

			
ULT3DB.1	2	22	160x80



Montageart

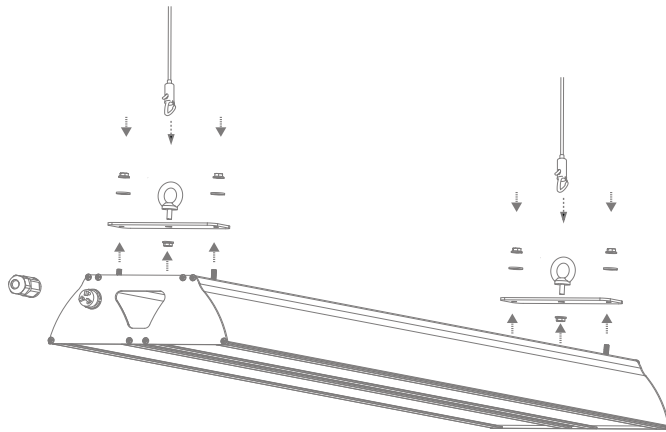




Deckenaufbau



Seilabhängung

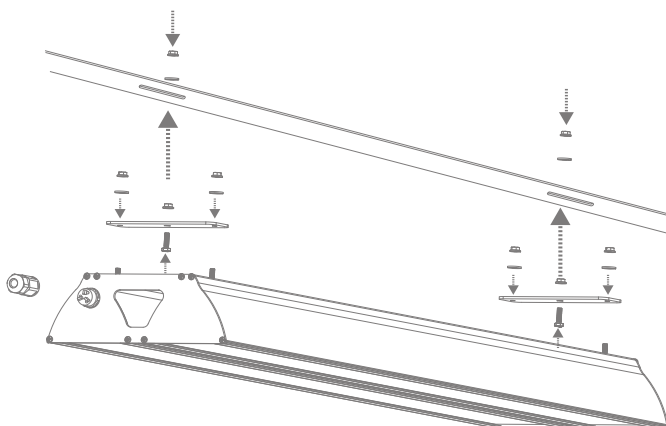

Lichtstärke

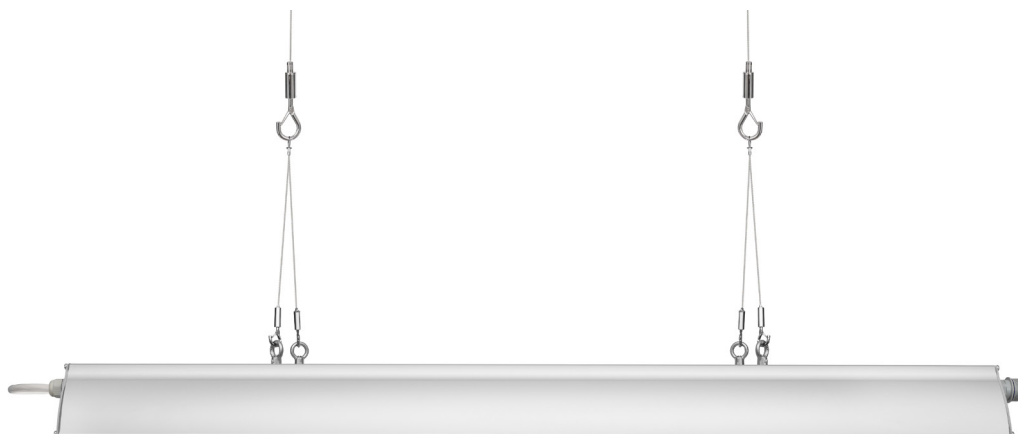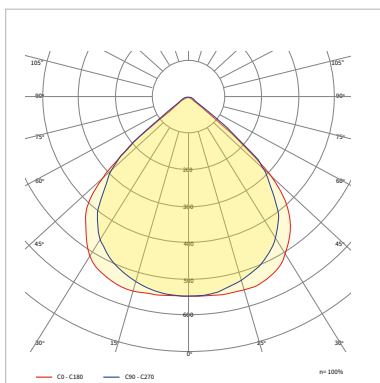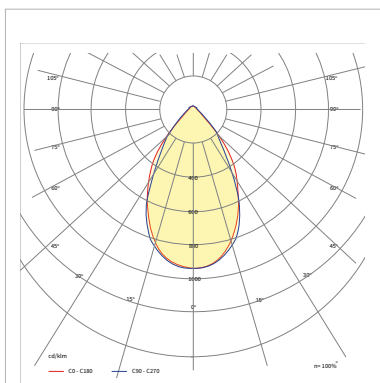

Verfügbare Konfigurationen

Familie	Leistungs- version	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahl- winkel	Lichtsteu- erung	Betriebstem- peratur [°C]	Garantie	Modifika- tionen
ULT3DB Ultima LED DB 3.0	1	0	222	8	A	4000	1	P11	065060	00	2540	05Y	0000
	1	Standard	222W	>80	Mid Power	4000K	PMMA	PMMA transparent	65°x60°	ON/OFF	-25°C÷40°C	5 Jahre	Standard
			290 290W			5000 5000K		G11 Gehärtetes Glas transparent	095090 95°x90°	D0 DALI	2545 -25°C÷45°C		
											3545 -35°C÷45°C		
											3550 -35°C÷50°C		

Beispiel-Produktcode:

[ULT3DB.10.290.8A4000.1G11.065060.00.2540.10Y.0000](#)