




ULTIMA LED 3.0 ENEC

Vorteile

- Hohe Lichtausbeute 172 lm/W
- Garantie 10 Jahren
- Diffusor aus gehärtetem Glas oder PMMA
- Weiter Betriebstemperaturbereich
- Hohe Schlagfestigkeit IK10

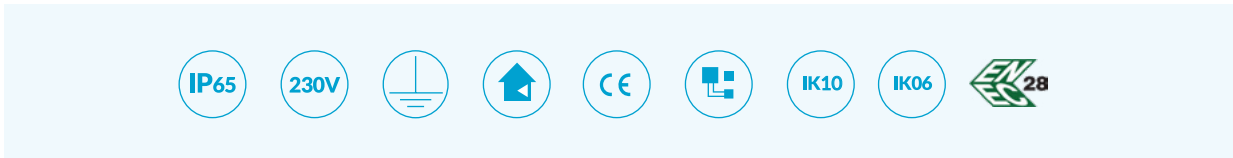

Ultima LED 3.0 1

	P	min-max		Ra	IP		
ULT3ST.18.021.8A4000	21	3250 - 3400	4000K	>80	IP65	60°X60° 90°X90°	2kg
ULT3ST.18.021.8A5000	21	3300 - 3450	5000K	>80	IP65	60°X60° 90°X90°	2kg

Ultima LED 3.0 2

	P	min-max		Ra	IP		
ULT3ST.28.042.8A4000	42	6600 - 6900	4000K	>80	IP65	60°X60° 90°X90°	3,3kg
ULT3ST.28.042.8A5000	42	6650 - 6950	5000K	>80	IP65	60°X60° 90°X90°	3,3kg

Ultima LED 3.0 3









	P	min-max		Ra	IP		
ULT3ST.38.053.8A4000	53	8700 - 9100	4000K	>80	IP65	60°X60° 90°X90°	4,3kg
ULT3ST.38.053.8A5000	53	8750 - 9150	5000K	>80	IP65	60°X60° 90°X90°	4,3kg

Ultima LED 3.0 4









	P	min-max		Ra	IP		
ULT3ST.48.083.8A4000	83	12700 - 13300	4000K	>80	IP65	60°X60° 90°X90°	4,3kg
ULT3ST.48.083.8A5000	83	12750 - 13350	5000K	>80	IP65	60°X60° 90°X90°	4,3kg

Um die Lichtparameter für den ausgewählten Abstrahlwinkel genau zu kennen, verwenden Sie bitte photometrische Dateien für den angegebenen Abstrahlwinkel. Download-Link: luxon.pl/Pliki/LDT-LUXON-LED-2020.zip









Ultima LED 3.0 5

		 min-max					
ULT3ST.58.110.8A4000	110	17000 - 17800	4000K	>80	IP65	60°X60° 90°X90°	5,5kg
ULT3ST.58.110.8A5000	110	17050 - 17850	5000K	>80	IP65	60°X60° 90°X90°	5,5kg









Ultima LED 3.0 6


		 min-max					
ULT3ST.68.145.8A4000	145	21600 - 22600	4000K	>80	IP65	60°X60° 90°X90°	5,5kg
ULT3ST.68.145.8A5000	145	21650 - 22650	5000K	>80	IP65	60°X60° 90°X90°	5,5kg

Ultima LED 3.0 7


		 min-max					
ULT3ST.78.195.8A4000	195	29550 - 30900	4000K	>80	IP65	60°X60° 90°X90°	8,2kg
ULT3ST.78.195.8A5000	195	29600 - 30950	5000K	>80	IP65	60°X60° 90°X90°	8,2kg


Ultima LED 3.0 8



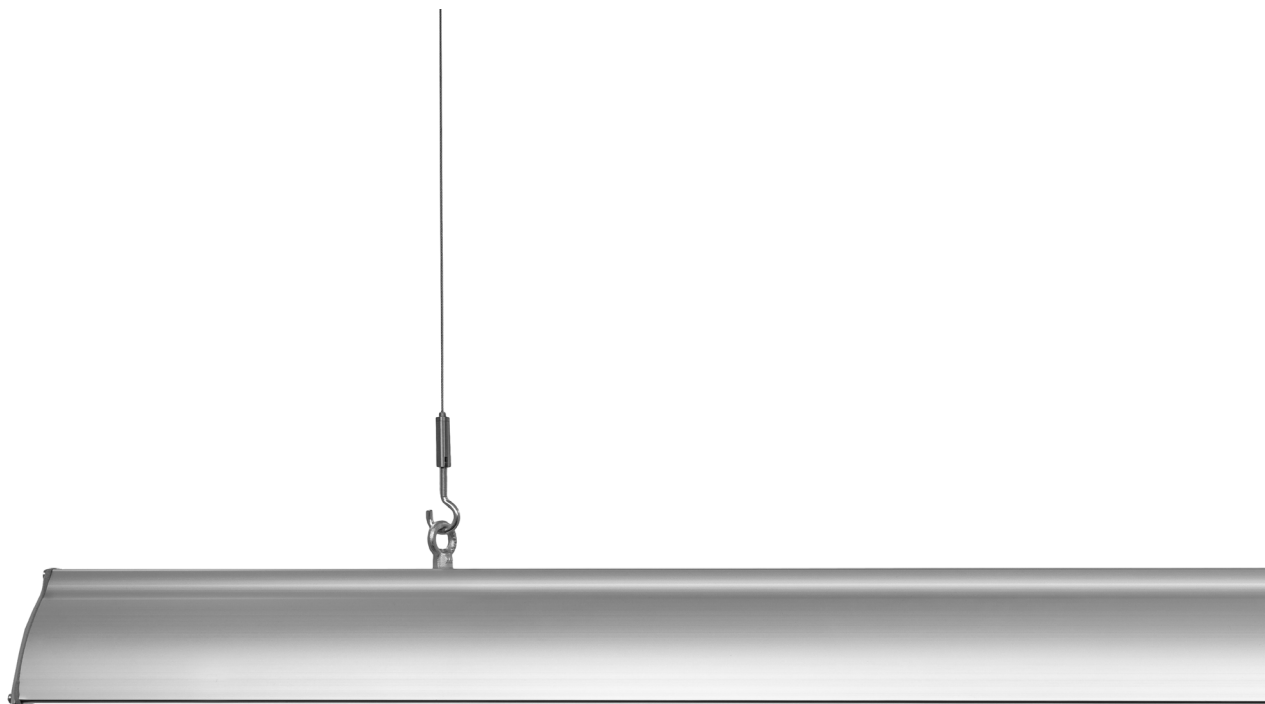

		 min-max					
ULT3ST.88.260.8A4000	260	39500 - 41300	4000K	>80	IP65	60°X60° 90°X90°	10,5kg
ULT3ST.88.260.8A5000	260	39550 - 41350	5000K	>80	IP65	60°X60° 90°X90°	10,5kg

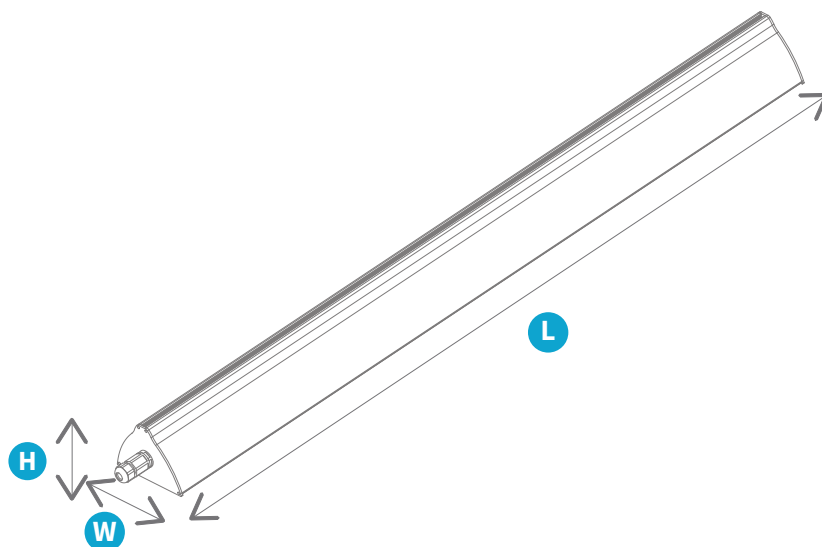


Abmessungen und Logistik





	H	L	W
ULT3ST.1	91	408	126
ULT3ST.2	91	708	126
ULT3ST.3	91	978	126
ULT3ST.4	91	978	126
ULT3ST.5	91	1275	126
ULT3ST.6	91	1275	126
ULT3ST.7	91	1878	126
ULT3ST.8	91	2458	126

			
ULT3ST.1	4	34	120x80
ULT3ST.2	4	34	120x80
ULT3ST.3	4	54	120x80
ULT3ST.4	4	54	120x80
ULT3ST.5	4	50	130x80
ULT3ST.6	4	50	130x80
ULT3ST.7	3	40	200x80
ULT3ST.8	2	36	300x80

Montageart

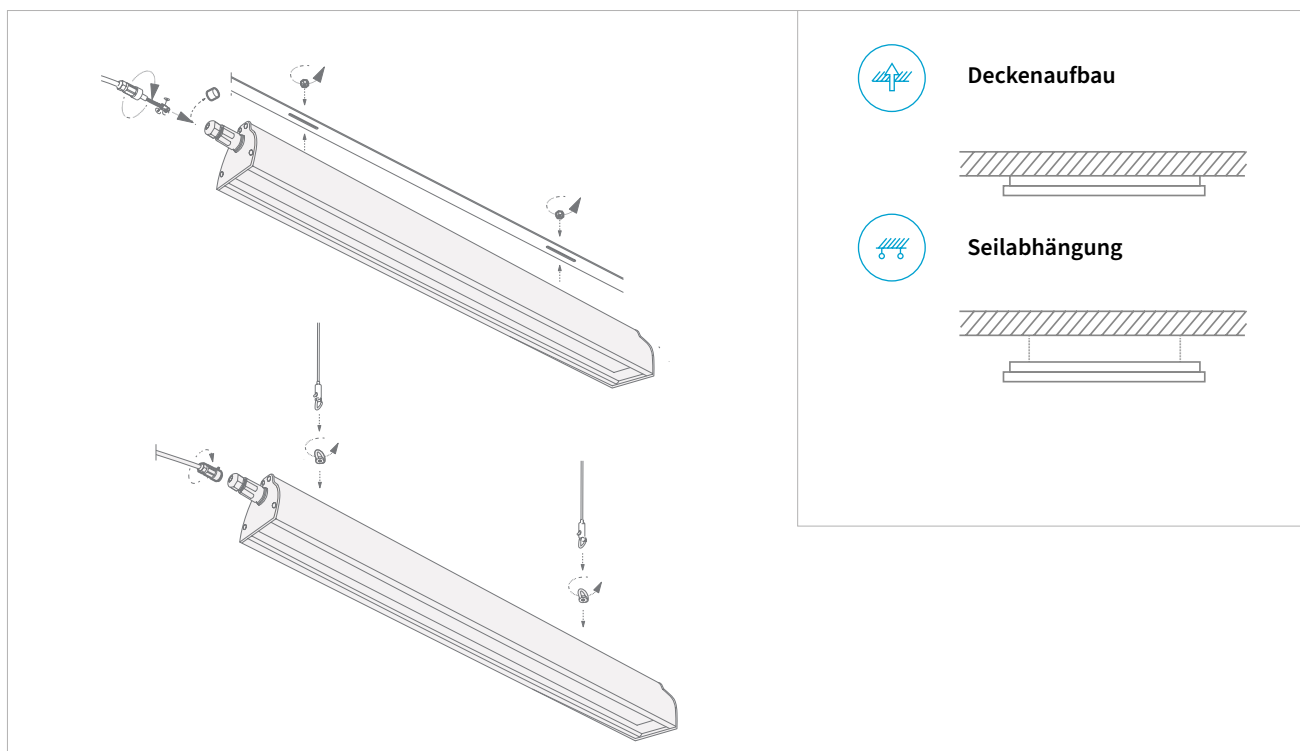

Lichtstärke

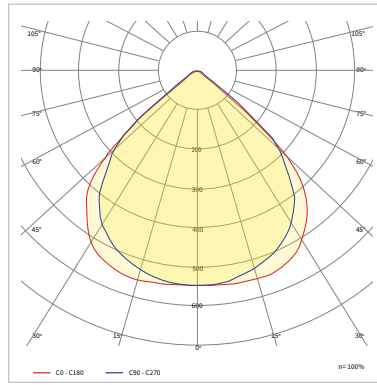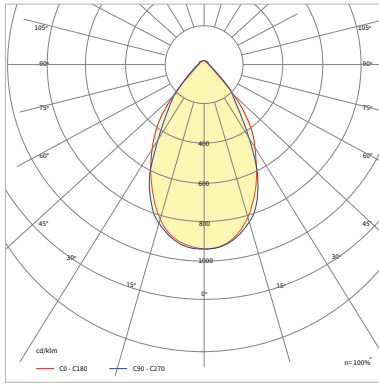

Verfügbare Konfigurationen

Familie	Leistungs- version	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahl- winkel	Lichtsteu- erung	Betriebstem- peratur [°C]	Garantie	Modifika- tionen	
ULT3ST Ultima LED 3	1	8 ENEC	021 21W	8 >80	A Mid Power	4000 4000K	1 PMMA	P11 PMMA transparent	060060 60°x60°	00 ON/OFF	2540 -25°C+40°C	05Y 5 Jahre	0000 Standard	
	2		042 42W			5000 5000K		G11 Gehärtetes Glas transparent	090090 90°x90°		2545 -25°C+45°C			08Y 8 Jahre
	3		053 53W					2555 -25°C+55°C	10Y 10 Jahre					
	4		083 83W					3545 -35°C+45°C						
	5		110 110W					3550 -35°C+50°C						
	6		145 145W					3560 -35°C+60°C						
	7		195 195W											
	8		260 260W											

Beispiel-Produktcode:

[ULT3ST.28.042.8A4000.1G11.090090.D0.3560.05Y.0000](#)