

# ULTIMA LED HT 3.0 ENEC

## Advantages

- Protection class at the level of IP65
- Solid aluminum housing
- High operating temperature range
- Branded components



### Ultima LED 3.0 1

		min-max					
ULT3HT.18.042.8A4000	42	6450	4000K	>80	IP65	60°X60° 90°X90°	4,6kg
ULT3HT.18.042.8A5000	42	6500	5000K	>80	IP65	60°X60° 90°X90°	4,6kg

### Ultima LED 3.0 2

		min-max					
ULT3HT.28.053.8A4000	53	8600	4000K	>80	IP65	60°X60° 90°X90°	6,2kg
ULT3HT.28.053.8A5000	53	8650	5000K	>80	IP65	60°X60° 90°X90°	6,2kg

### Ultima LED 3.0 3

		min-max					
ULT3HT.38.083.8A4000	83	12700	4000K	>80	IP65	60°X60° 90°X90°	6,2kg
ULT3HT.38.083.8A5000	83	12750	5000K	>80	IP65	60°X60° 90°X90°	6,2kg

### Ultima LED 3.0 4


		min-max					
ULT3HT.48.110.8A4000	110	16950	4000K	>80	IP65	60°X60° 90°X90°	7,8kg
ULT3HT.48.110.8A5000	110	17000	5000K	>80	IP65	60°X60° 90°X90°	7,8kg


### Ultima LED 3.0 5

		min-max					
ULT3HT.58.145.8A4000	145	21350	4000K	>80	IP65	60°X60° 90°X90°	7,8kg
ULT3HT.58.145.8A5000	145	21400	5000K	>80	IP65	60°X60° 90°X90°	7,8kg


In order to know exact the light parameters for selected beam angle, please use photometric files for the given beam angle. Download link: [luxon.pl/Pliki/LDT-LUXON-LED-2020.zip](http://luxon.pl/Pliki/LDT-LUXON-LED-2020.zip)

## Dimensions and Logistics


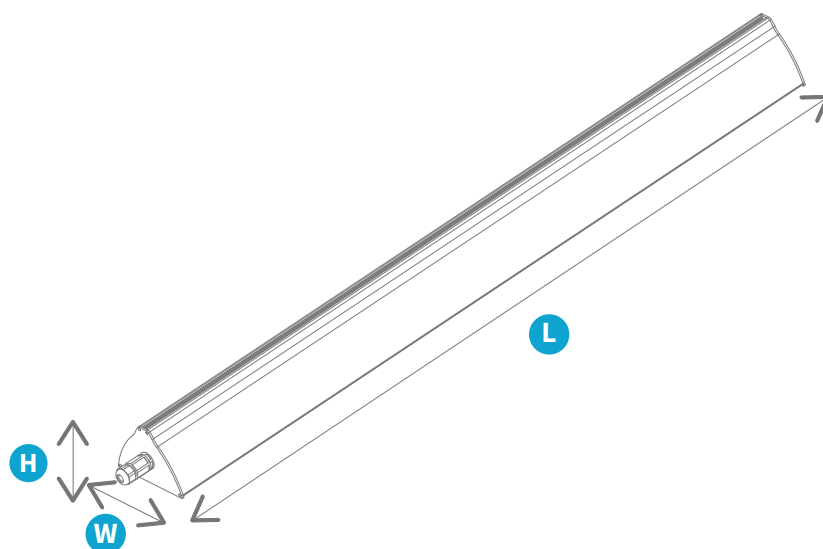


	H	L	W
ULT3HT.1	230	838	126
ULT3HT.2	230	1108	126
ULT3HT.3	230	1108	126
ULT3HT.4	230	1405	126
ULT3HT.5	230	1405	126

## Montage

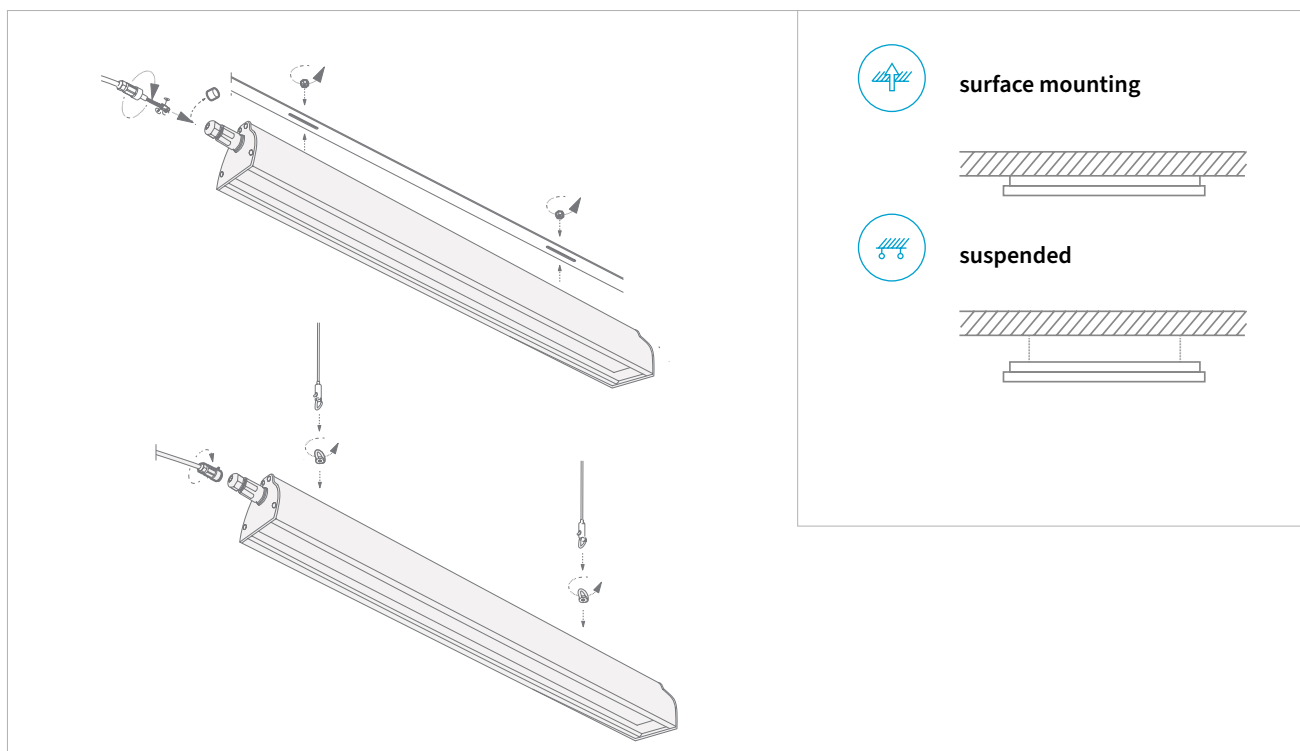

## Light distribution

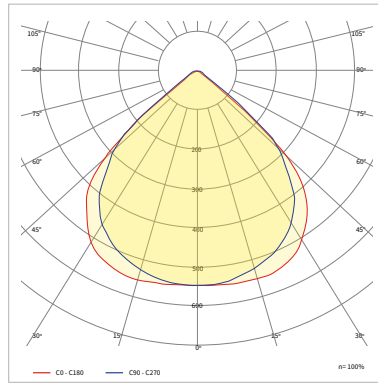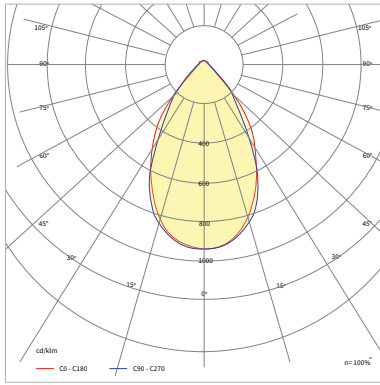

## Available Configurations

Family	Power version	Version	Power [W]	CRI	Diode type	CCT [K]	Lens material	Diffuser material	Beam angle	Type of control	Operating temperature[°C]	Warranty	Modifications
ULT3HT Ultima LED HT 3.0	1	8 ENEC	042	8 >80	A Mid Power	4000	2 PC lens	P21 PC diffuser transparent	060060	00 ON/OFF	3565	05Y 5 years	0000 Standard
	1		42W			4000K			60°x60°		-35°C+65°C		
	2	053	5000			G11 Tempered glass transparent	090090	D0 DALI	3570				
	2	53W	5000K				90°x90°		-35°C+70°C				
	3	053	110			110W	145	145W					
	3	53W											
	4	083											
	4	83W											
	5	110											
	5	110W											
5	145												
5	145W												

Example product code:

[ULT3HT.20.053.8A5000.2P21.070055.D0.3570.05Y.0000](#)